

English Version

**Public transport - Service interface for real-time information
relating to public transport operations - Part 1: Context and
framework**

Öffentlicher Verkehr - Dienstleitungsschnittstelle für
zeitnahe Informationen zum Betrieb des öffentlichen
Verkehrs - Teil 1: Rahmen und Gerüst

This Technical Specification (CEN/TS) was approved by CEN on 23 October 2006 for provisional application.

The period of validity of this CEN/TS is limited initially to three years. After two years the members of CEN will be requested to submit their comments, particularly on the question whether the CEN/TS can be converted into a European Standard.

CEN members are required to announce the existence of this CEN/TS in the same way as for an EN and to make the CEN/TS available promptly at national level in an appropriate form. It is permissible to keep conflicting national standards in force (in parallel to the CEN/TS) until the final decision about the possible conversion of the CEN/TS into an EN is reached.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

Page

Foreword.....	4
Introduction	5
1 Scope	6
1.1 Interfaces Specified by this Technical Specification	6
1.1.1 Business Context.....	6
1.1.2 SIRI Communications.....	6
1.1.3 SIRI Functional Services	7
1.2 Use of the SIRI standard	7
1.3 Limitations on SIRI and Possible Future Developments	8
2 Normative references	9
3 Terms and definitions	9
3.1 Transport Related Terms	9
3.2 Communications & Software Concepts	19
3.3 Types of Reference Data Used in SIRI.....	27
3.3.1 General.....	27
3.3.2 Date and time format	28
3.3.3 Location coordinate system	28
3.3.4 National language of text elements	29
3.3.5 Participant (information provider) identification	30
3.3.6 Participant pair identification (service participant pair code).....	30
3.3.7 Point and place references	31
3.3.8 Vehicle journey references	32
3.3.9 Line, and direction references.....	33
3.3.10 Stop sequence references and circular journeys	34
3.3.11 Schedule version references	36
3.3.12 Product category references	36
3.3.13 Vehicle and stop feature references	41
3.3.14 Service features	42
3.3.15 Situation references	44
3.3.16 Summary of Data Reference Scopes	44
3.3.17 Transmodel Compliant Models	45
3.3.18 Modelling Vehicle Journeys in SIRI	46
4 Symbols and abbreviations	53
4.1 General.....	53
4.2 Representation of XML model elements in Text.....	54
4.3 Representing Relationships in SIRI	54
4.4 Notation for XML model structures of SIRI messages.....	55
4.4.1 General.....	55
4.4.2 Organisational Group label.....	56
4.4.3 Element Name	56
4.4.4 Multiplicity & Choice (Min:Max).....	56
4.4.5 Data Type	57
4.4.6 Description	57
4.5 Notation for Diagrams	57
Annex A (informative) Checklist for Implementing SIRI	58
A.1 Usage of the DSRC application layer.....	58
A.2 Legal and Commercial Issues	58
A.3 Functional Aspects.....	58
A.3.1 Main Scope	58

A.3.2	Service Configuration	59
A.3.3	Reference data	59
A.3.4	Error Handling	60
A.4	Operational Aspects.....	60
A.4.1	Systems Management.....	60
A.4.2	Provisioning	60
Annex B	(informative) Business Context.....	62
B.1	Purpose of This Section	62
B.2	Business Model	63
B.2.1	Passenger Transport Operations	63
B.2.2	Organisations	65
B.3	Use of information in Public Transport.....	65
B.3.1	Overview.....	65
B.3.2	Data Ownership	65
B.3.3	Temporal Considerations	68
B.3.4	Information Security.....	68
B.3.5	Regulatory Issues.....	69
B.4	Use Cases for this Technical Specification	69
B.4.1	Introduction.....	69
B.4.2	Use Case: Provision of Service Information to Passengers.....	70
B.4.3	Use Case: Journey Planning.....	71
B.4.4	Use Case: Facilitating Connections for Passengers	72
B.4.5	Use Case: Fleet and Network Management.....	73
B.4.6	Use Case: General Business Communications	73
B.5	SIRI System Model	74
B.5.1	Modularisation	74
B.5.2	PT Infrastructure Management Module.....	74
B.5.3	Transport Infrastructure Management Module.....	74
B.5.4	PT Scheduling Module	75
B.5.5	PT Integration Module.....	75
B.5.6	Traffic Management Control Centre	75
B.5.7	PT Operational Control	76
B.5.8	PT Journey Planner.....	77
B.5.9	Passenger Information.....	77
Annex C	(informative) Background and Mapping of Some Current Implementations to SIRI	78
C.1	Introduction.....	78
C.2	SIRI origins.....	78
C.2.1	VDV453/VDV454.....	78
C.2.2	TRIDENT	78
C.2.3	RTIG-XML	79
C.2.4	CEN TC278 WG3 SG7	80
C.3	Deployment Example – Berlin	81
C.4	Deployment Example – Hamburg	82
C.5	Deployment Example – West Yorkshire.....	82
C.6	Deployment Example – Czech Republic	83
C.7	Deployment Example – Copenhagen	84
C.8	Deployment example – Île-de-France	85
Bibliography	87

Foreword

This document (CEN/TS 15531-1:2007) has been prepared by Technical Committee CEN/TC 278 “Road transport and traffic telematics”, the secretariat of which is held by NEN.

This presents Part 1 of the European Technical Specification known as “SIRI”. SIRI provides a framework for specifying communications and data exchange protocols for organisations wishing to exchange Real-time Information (RTI) relating to public transport operations.

SIRI is presented in three parts:

- Context and framework, including background, scope and role, normative references, terms and definitions, symbols and abbreviations, business context and use cases (Part 1).
- The mechanisms to be adopted for data exchange communications links (Part 2).
- Data structures for a series of individual application interface modules (Part 3).

The XML schema can be downloaded from <http://www.siri.org.uk/>, along with available guidance on its use, example XML files, and case studies of national and local deployments.

It is recognised that SIRI is not complete as it stands, and there will be a substantial amount of work required to continue to develop SIRI over the coming years. It is therefore intended that a SIRI Management Group should continue to exist, at European level, based on the composition of SG7.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to announce this CEN Technical Specification: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

Introduction

Public transport services rely increasingly on information systems to ensure reliable, efficient operation and widely accessible, accurate passenger information. These systems are used for a range of specific purposes: setting schedules and timetables; managing vehicle fleets; issuing tickets and receipts; providing real-time information on service running, and so on.

This Technical Specification specifies a Service Interface for Real-time Information (SIRI) about Public Transport. It is intended to be used to exchange information between servers containing real-time public transport vehicle or journey time data. These include the control centres of transport operators and information systems that utilise real-time vehicle information, for example, to deliver services such as travel information.

Well-defined, open interfaces have a crucial role in improving the economic and technical viability of Public Transport Information Systems of all kinds. Using standardised interfaces, systems can be implemented as discrete pluggable modules that can be chosen from a wide variety of suppliers in a competitive market, rather than as monolithic proprietary systems from a single supplier. Interfaces also allow the systematic automated testing of each functional module, vital for managing the complexity of increasing large and dynamic systems. Furthermore, individual functional modules can be replaced or evolved, without unexpected breakages of obscurely dependent function.

This Technical Specification will improve a number of features of public transport information and service management:

- Interoperability – the Technical Specification will facilitate interoperability between information processing systems of the transport operators by: (i) introducing common architectures for message exchange; (ii) introducing a modular set of compatible information services for real-time vehicle information; (ii) using common data models and schemas for the messages exchanged for each service; and (iv) introducing a consistent approach to data management.
- Improved operations management – the Technical Specification will assist in better vehicle management by (i) allowing the precise tracking of both local and roaming vehicles; (ii) providing data that can be used to improve performance, such as the measurement of schedule adherence; and (iii) allowing the distribution of schedule updates and other messages in real-time.
- Delivery of real-time information to end-users – the Technical Specification will assist the economic provision of improved data by: (i) enabling the gathering and exchange of real-time data between VAMS systems; (ii) providing standardised, well defined interfaces that can be used to deliver data to a wide variety of distribution channels.

Technical advantages include the following:

- Reusing a common communication layer for all the various technical services enables cost-effective implementations, and makes the Technical Specification readily extensible in future.

1 Scope

1.1 Interfaces Specified by this Technical Specification

1.1.1 Business Context

Real-time information may be exchanged between a number of different organisations, or between different systems belonging to the same organisation. Key interfaces include the following:

- Between public transport vehicle control centres – generally, for fleet and network management.
- Between a control centre and an information provision system – generally, to provide operational information for presentation to the public.
- Between information provision systems – generally, sharing information to ensure that publicly available information is complete and comprehensive.

Annex B describes the business context for SIRI in more detail.

SIRI is intended for wide scale, distributed deployment by a wide variety of installations. In such circumstances it is often not practical to upgrade all the systems at the same time. SIRI therefore includes a formal versioning system that allows for the concurrent operation of different levels at the same time and a disciplined upgrade process.

In this general framework, SIRI defines a specific set of concrete functional services. The services separate the communication protocols from the message content ('functional services'). This allows the same functional content to be exchanged using different transport mechanisms, and different patterns of exchange. Figure 1 below shows this diagrammatically.

1.1.2 SIRI Communications

SIRI provides a coherent set of functional services for exchanging data for different aspects of PT operation. A common data model, based on TransModel 5.1, is used across all services.

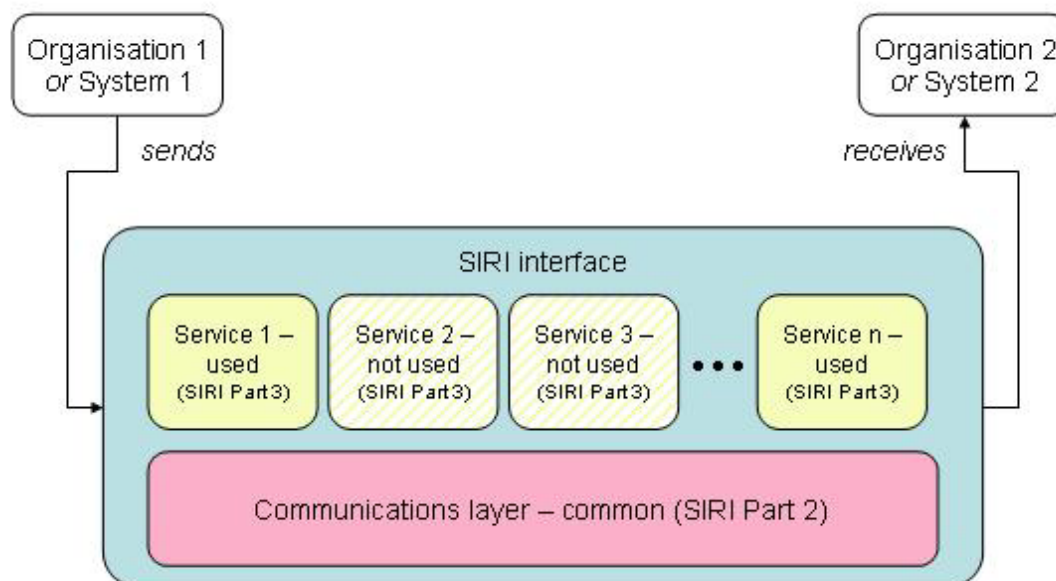


Figure 1 — Structure of SIRI: a set of optional service interface specifications using a common communications layer

A communication layer defines common procedures for the requesting and exchanging of data. Within SIRI, the same general communication protocols are used for all the different concrete functional interfaces, and specify a common infrastructure for message referencing, error handling, reset behaviour and so forth. The communications layer is defined in Part 2 of the SIRI document set.

To allow the most efficient use to be made of bandwidth and processing capacity, the SIRI communications architecture supports several different patterns of interaction. SIRI supports both request/response and publish/subscribe protocols between servers, allowing applications both to pull or to push data.

The SIRI publish/subscribe pattern of interaction follows the paradigm described in the W3C candidate standard 'Publish-Subscribe Notification for Web Services (WS-PubSub)'. SIRI uses the same separation of concerns, and a similar terminology for Publish/Subscribe concepts as is used in WS-PubSub.

For the delivery of data in response to both requests and subscriptions, SIRI supports two common patterns of message exchange as realised in existent national systems:

- One-step 'direct' delivery: allowing the simple rapid delivery of data
- Two-step 'fetched' delivery: allowing a more optimised use of limited resources.

1.1.3 SIRI Functional Services

SIRI provides specific protocols for the following functional services, defined in Part 3 of the SIRI document set:

- Production Timetable [PT] Service: To send daily information on the operational timetable and associated vehicle running information.
- Estimated Timetable [ET] Service: To send real-time information on timetable, including changes based on the production service and on actual running conditions.
- Stop Timetable [ST] Service: To provide a stop-centric view of timetabled vehicle arrivals and departures at a designated stop.
- Stop Monitoring [SM] Service: To send real-time arrival & departure information relating to a specific stop.
- Vehicle Monitoring [VM] Service: To send real-time information on the movement and predicted movement of vehicles.
- Connection Timetable [CT] Service: To send an operational timetable for a service feeding an interchange, in order to inform departing services of the possible need to wait for connecting passengers.
- Connection Monitoring [CM] Service: To send real-time information on the running of a service inbound to an interchange, in order to advise departing services of the need to wait for connecting passengers. This can also be used to send real-time information to assist passengers in planning their onward journey following a connection.
- General Message [GM] Service: To exchange informative messages between participants.

1.2 Use of the SIRI standard

As a framework standard, it is not necessary for individual systems or specifications to implement the whole of the SIRI standard. Specifically it is intended that individual national bodies may adopt consistent subsets of the standard. However, it should be possible to describe (for those elements of systems, interfaces and specifications which fall within the scope of SIRI):

- The aspects of SIRI that they have adopted.