

INTERNATIONAL STANDARD

**Global maritime distress and safety system (GMDSS) –
Part 2: COSPAS-SARSAT EPIRB – Satellite emergency position indicating radio
beacon operating on 406 MHz – Operational and performance requirements,
methods of testing and required test results**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2008 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

**Global maritime distress and safety system (GMDSS) –
Part 2: COSPAS-SARSAT EPIRB – Satellite emergency position indicating radio
beacon operating on 406 MHz – Operational and performance requirements,
methods of testing and required test results**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE



CONTENTS

FOREWORD.....	5
1 Scope.....	7
2 Normative references	8
3 Performance requirements	9
3.1 Compliance	9
3.2 General.....	9
3.3 Operational	10
3.3.1 Prevention of inadvertent activation.....	10
3.3.2 Immersion, buoyancy and drop into water.....	10
3.3.3 Activation	10
3.3.4 Self-test.....	11
3.3.5 Colour and retro-reflecting material	11
3.3.6 Lanyard.....	11
3.3.7 Exposure to the marine environment.....	11
3.3.8 Ergonomics	12
3.3.9 Indication of previous activation.....	12
3.4 Distress function	12
3.5 Float-free arrangements	12
3.5.1 General	12
3.5.2 External power or data connection.....	13
3.5.3 Ability to check the automatic release.....	13
3.5.4 Manual release.....	13
3.6 Environment for satellite EPIRB	13
3.6.1 Temperature and icing.....	13
3.6.2 Wind speed	13
3.6.3 Stowage.....	13
3.6.4 Shock and vibration.....	13
3.7 Environment for float-free arrangement	13
3.8 Interference – electromagnetic compatibility.....	14
3.9 Maintenance.....	14
3.10 Safety precautions	14
3.11 Equipment manuals.....	14
3.12 Labelling	16
3.12.1 Equipment labelling	16
3.12.2 Float-free arrangement labelling	16
3.13 Installation	16
4 Technical characteristics	17
4.1 Transmitted frequency.....	17
4.2 Signal and message format.....	17
4.3 Distress message memory	17
4.4 Beacon identification code.....	17
4.5 121,5 MHz homing signal	17
4.6 Power source	17
4.6.1 General	17
4.6.2 Battery life and expiry date.....	18
4.6.3 Expiry date indication	18

4.6.4	Reverse polarity protection	18
4.7	Antenna characteristics	18
5	Methods of testing and required test results	18
5.1	General	18
5.1.1	COSPAS-SARSAT type approval	18
5.1.2	Power supply	19
5.1.3	Warm-up period	19
5.1.4	Instructions	19
5.1.5	Additional facilities	19
5.1.6	Audible and visual indications	19
5.1.7	Preparation of satellite EPIRB for type-approval testing	19
5.1.8	Test conditions	20
5.1.9	Test sequence	20
5.1.10	Performance check	20
5.1.11	Performance test	20
5.2	General tests	21
5.2.1	Tests for float-free arrangements	21
5.3	Operational tests	22
5.3.1	Prevention of inadvertent activation	22
5.3.2	Immersion, buoyancy and drop into water	22
5.3.3	Activation	22
5.3.4	Self-test	24
5.3.5	Colour and retro-reflecting material	24
5.3.6	Lanyard	24
5.3.7	Exposure to marine environment	24
5.3.8	Ergonomics	25
5.3.9	Indication of previous activation	25
5.4	Distress function	25
5.5	Float-free arrangements	25
5.5.1	General	25
5.5.2	External power or data connection	26
5.5.3	Ability to check the automatic release	26
5.5.4	Manual release	26
5.6	Environment	26
5.6.1	Temperature	26
5.6.2	Icing	26
5.6.3	Wind speed	26
5.6.4	Stowage	26
5.6.5	Shock and vibration	26
5.7	Environment for float-free arrangement	26
5.8	Interference – Electromagnetic compatibility	26
5.9	Maintenance	27
5.10	Safety precautions	27
5.11	Equipment manuals	27
5.12	Labelling	27
5.12.1	Equipment labelling	27
5.12.2	Float-free arrangement labelling	27
5.13	Installation	27
5.14	Technical characteristics	27

5.15	Power source	27
5.15.1	Battery capacity and low-temperature test	27
5.15.2	Expiry date indication	28
5.15.3	Reverse polarity protection	28
5.16	Antenna characteristics	28
5.17	Environment	28
5.17.1	Dry heat cycle, of IEC 60945	29
5.17.2	Damp heat cycle, of IEC 60945	29
5.17.3	Low-temperature cycle	29
5.17.4	Thermal shock test, of IEC 60945	29
5.17.5	Drop test for portable equipment, of IEC 60945	29
5.17.6	Vibration test, of IEC 60945	29
5.17.7	Ruggedness test	30
5.17.8	Immersion test, of IEC 60945	30
5.17.9	Solar radiation test, of IEC 60945	30
5.17.10	Oil resistance test, of IEC 60945	30
5.17.11	Corrosion test, of IEC 60945	30
5.18	Interference testing	31
5.19	Spurious emissions	31
5.20	Compass safe distance	31
5.21	Conducted interference	31
Annex A (normative)	Sequence of tests	32
Annex B (normative)	Internal and external navigation devices	34
Annex C (normative)	Standard for a satellite EPIRB without a float-free mechanism	36
Annex D (normative)	Technical standard for 121,5 MHz homing device	38
Annex E (informative)	User experience of COSPAS-SARSAT satellite EPIRB operation	44
Figure D.1	– Spurious emission mask for 121,5 MHz signal	42
Figure D.2	– Typical modulation waveforms	43
Table 1	– EPIRB control functions	9
Table 2	– Effective luminous intensity	24

INTERNATIONAL ELECTROTECHNICAL COMMISSION

GLOBAL MARITIME DISTRESS AND SAFETY SYSTEM (GMDSS) –**Part 2: COSPAS-SARSAT EPIRB – Satellite emergency position
indicating radio beacon operating on 406 MHz –
Operational and performance requirements,
methods of testing and required test results**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61097-2 has been prepared by IEC technical committee 80: Maritime navigation and radiocommunication equipment and systems.

This third edition cancels and replaces the second edition, published in 2002, of which it constitutes a technical revision.

The significant changes in this edition include revised characteristics for the low duty cycle light in 3.3.3 c), together with a revised test in 5.3.3.3, to allow the use of white LEDs. Requirements for retro-reflecting material and the lanyard have been clarified in 3.3 noting the ever decreasing size of EPIRBs, and requirements for equipment manuals and labelling clarified in 3.11 and 3.12. Battery life requirements have been clarified in 4.6.2.

The test methods have been generally revised to align with the latest editions of COSPAS-SARSAT T.001 and T.007 and IEC 60945. An extra test requirement for a drop onto a hard

surface has been added, together with further frequency bands for the measurement of spurious emissions to protect aeronautical communications.

Annex B, which reproduced some COSPAS-SARSAT material has been deleted and replaced with a new annex giving requirements for EPIRBs associated with navigation devices.

Annex C, concerning EPIRBs without a float free mechanism, has been expanded and Annex D, concerning the homing device, includes a new radiated power test “off ground plane” and clarification to the measurement of spurious emissions.

The text of this standard is based on the following documents:

CDV	Report on voting
80/480/CDV	80/514/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.


This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61097 series, under the general title *Global maritime distress and safety system* (GMDSS), can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

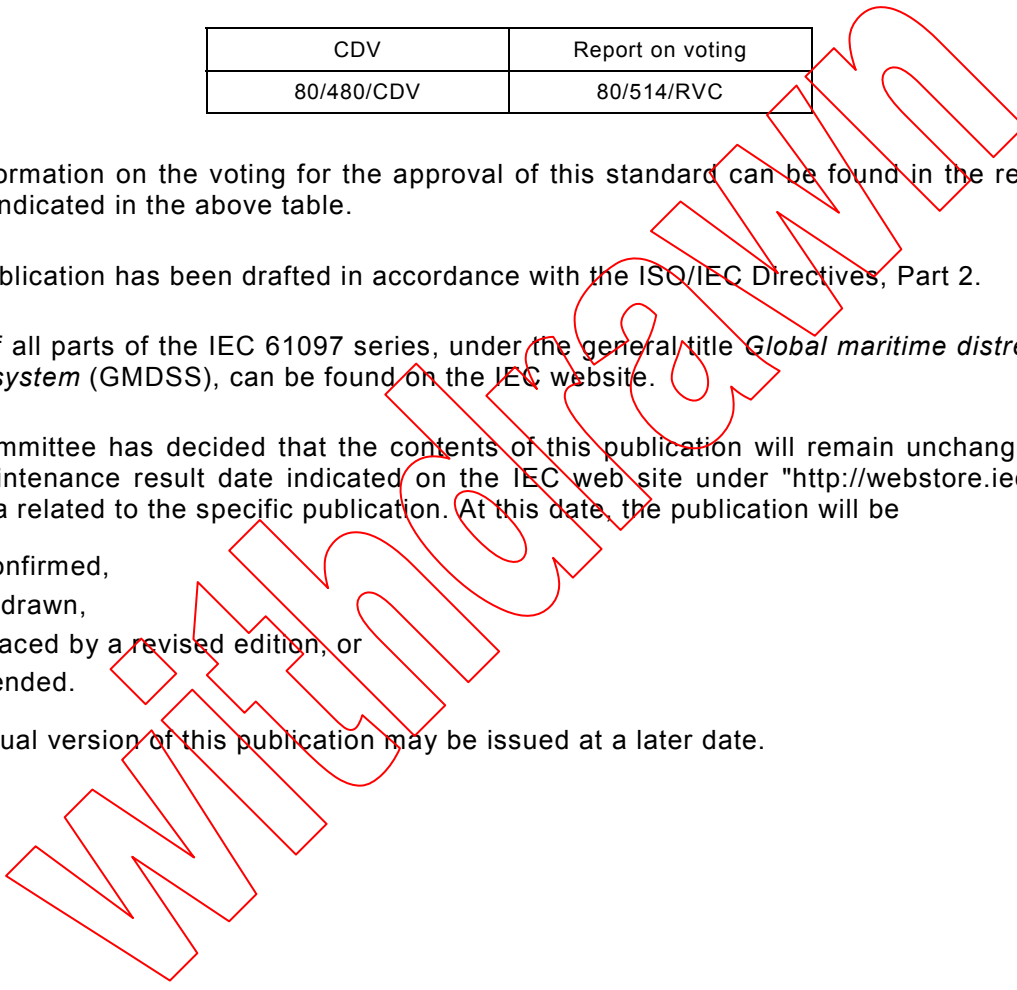

GLOBAL MARITIME DISTRESS AND SAFETY SYSTEM (GMDSS) –

Part 2: COSPAS-SARSAT EPIRB – Satellite emergency position indicating radio beacon operating on 406 MHz – Operational and performance requirements, methods of testing and required test results

1 Scope

This part of IEC 61097 specifies the minimum performance requirements, technical characteristics and type-testing requirements of the satellite emergency position-indicating radio beacon used in the COSPAS-SARSAT satellite system (satellite EPIRB), as required by Regulation IV/7.1.6 of the 1988 amendments to the 1974 International Convention for Safety of Life at Sea (SOLAS), and which is associated with IEC 60945. When a requirement in this standard is different from IEC 60945, the requirement in this standard takes precedence.

This standard incorporates the performance standards of IMO Resolution A.810(19), the International Telecommunication Union (ITU) Radio Regulations as well as the technical characteristics for such transmitters contained in Recommendation ITU-R M.633, and takes account of the general requirements contained in IMO Resolution A.694(17). This standard further takes account of IMO Resolution A.696(17) concerning the type approval of satellite EPIRBs.

This standard also includes minimum performance standards for a non-float-free satellite EPIRB without float-free release mechanism (see Annex C).

NOTE 1 Although a number of the requirements and tests may be similar this standard is not intended to be used with 406 MHz Ship Security Alert System (SSAS) Beacons.

All texts of this standard, whose wording is identical to that in the IMO SOLAS Convention 1974 as amended and Resolutions A.662(16), A.694(17), A.702(17) and A.810(19) and Recommendation ITU-R M.633 will be printed in italics and the Resolution/Recommendation and paragraph number indicated between brackets.

NOTE 2 Classes of satellite EPIRB's considered in this document are:

– Class 1: Float-free (–40 °C to +55 °C). The float-free release mechanism (A.662(16)) should be capable of operating throughout the temperature range of –30 °C to +65 °C.

This class is not required by IMO Resolutions but may be applied at the discretion of each Administration.

– Class 2: Float-free (–20 °C to +55 °C). The float-free release mechanism (A.662(16)) should be capable of operating throughout the temperature range of –30 °C to +65 °C.

NOTE 3 Non float-free, satellite EPIRB's in both classes are considered in Annex C.

NOTE 4 All classes include a 121,5 MHz homing device, described in Annex D.

NOTE 5 All classes may include beacon position data, obtained from a navigation device internal or external to the satellite EPIRB as described in Annex B.

NOTE 6 User experience of COSPAS-SARSAT satellite EPIRB operation leading to some clarification of IMO performance standards, and providing some useful information for satellite EPIRB users is included in Annex E.