

CORRIGENDUM 1

Changes to the French version appear further in the document.

Table 1 – Applicability of specific clauses of IEC 60079-0

Replace existing row 26.4.4 by the following new row:

26.4.4	26.4.4	Acceptance criteria	Applies	Applies	Excluded except when 6.1.2.3a) is applied
--------	--------	---------------------	---------	---------	---


Table 3 – Temperature classification of tracks on printed circuit boards (in a maximum ambient temperature of 40 °C)

Replace the eighth footnote by the following new footnote:

At terminations of components dissipating 0,25 W or more either normally or under fault conditions, and for 1,00 mm along the conductor, either multiply the track width by 3 or divide the maximum current specified by 2. Additionally, if the track goes under the component, apply the factor specified for tracks passing under components dissipating 0,25W or more.

Figure 1 – Separation of intrinsically safe and non-intrinsically safe terminals

Replace the drawing in Figure 1b by the following drawing:

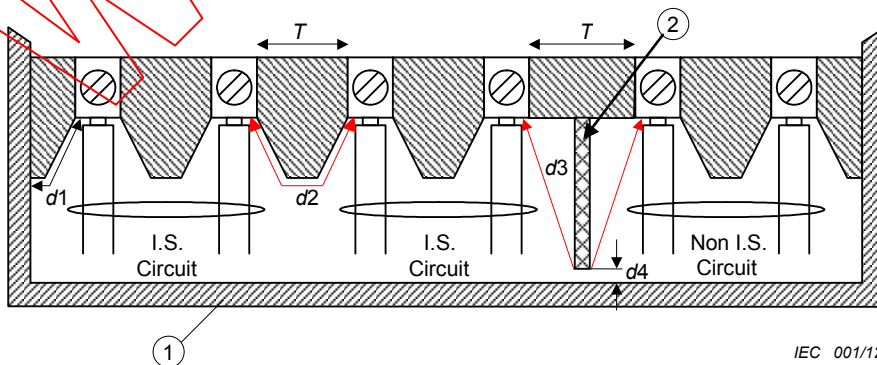

IEC 001/12

8.2.3 Transformer construction

Replace the existing fourth paragraph by the following new paragraph: